




SPECIFICATION		Installation Method
Product Construction	High & Low Loop	LX-2600 monolithic quarter turn ashlar bric
Face Yarn	Solution dyed Nylon	
Gauge	1/10 inch	
Stitches	40/10 cm	
Pile Height	5.0/3.0mm (±0.5mm)	
Pile Weight	520g/m ²	
Total Thickness	7.0mm (±0.5mm)	
Backing	Post consumer recycled PVC'ECOS	
Size	50x50cm	
Weight	4.3kg/m ²	
Antistatic Property	<1kV (JIS L-4406, synthetic sole)	
Flame Retardancy	E2200363 (LX-2600)	
Packing	20 pieces (5m ²) /case	

ECOS Recycle System

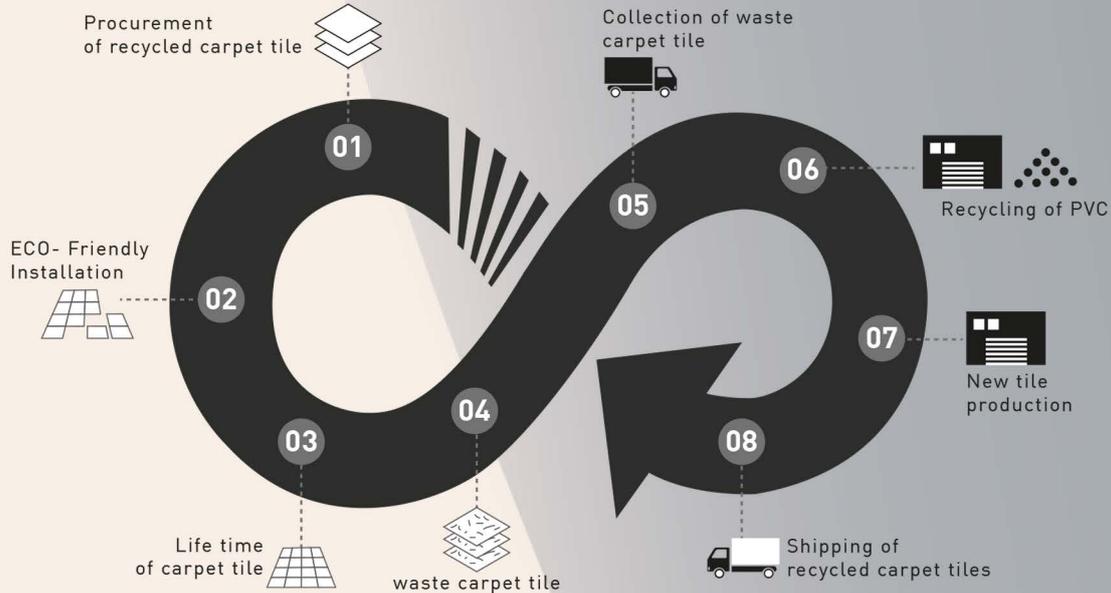

Eco Mark by Japan Environment Association (Inc)



Antistatic



Flame retardant



Soil Resistant



Low VOC



THERE MAY BE SLIGHT DIFFERENCE IN CARPET COLOR DUE TO DIFFERENT DYE LOT. EXACT CONFORMITY IN COLOR BETWEEN SAMPLES AND FINAL PRODUCTS IS NOT GUARANTEED.

